



FS: NRZ MHz KHz >>>>

GSL N2BL



Fashionable And Stylish



Numeric Pager

FEATURE

Slim And Compact Design

High - Visibility Backlight

Selectable Alert Mode

Melodies, tone and vibration are available.

Message Lock

Up to 8 locked messages.

FUNCTION


- Maximum 12 digits per screen
- 12 private messages with maximum 24 digits each
- 3 keys for quick and easy operation
- Up to 4 paging addresses
- Real time clock in 12 / 24hr format
- Repeated message indication
- Out of service range indication
- Individual / All message delete
- Unread message indication
- Low battery indication

DISPLAY



- | | | |
|-------------|----------------|---|
| 1. Pager on | 4. Lock | 7. Buzzer alert
(motor alert when off) |
| 2. Error | 5. Battery low | 8. In range |
| 3. Repeat | 6. Alarm on | 9. Next screen |

GENERAL GUIDE

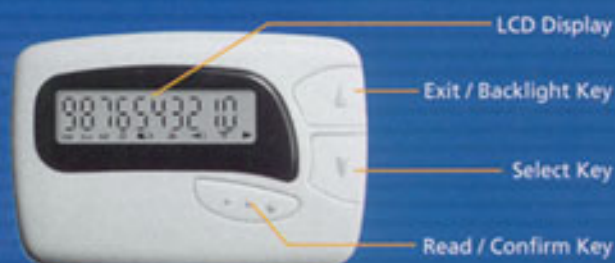

SPECIFICATION

Signal Format	POCSAG
Radio Frequency	136MHz – 174MHz 275MHz – 285MHz 452MHz – 468MHz
Bit Rate	512bps / 1200bps
Paging Sensitivity	512bps : 19dB μ V/m 1200bps: 22dB μ V/m
Spurious Rejection	>50dB
Channel Spacing	25KHz
Digital Modulation System	FSK
Deviation	+/- 4.5KHz
Intermodulation	>50dB
Battery	One AAA Battery
Battery Life	>30 days
Dimensions	L65 X W44 X H17(mm)
Weight (with battery)	44g



Group Sense Ltd.
27/F., Wu Chung House, 213 Queen's Road East,
Wanchai, Hong Kong.
Tel. : (852) 2832 8228
Fax. : (852) 2892 0361
Web Site : <http://www.gsl.com.hk>
Email : gsl@gsl.com.hk

TELCOM
RADI COMUNICACIONES

AVDA. DE LA INDUSTRIA, 32
28108 - MADRID