



G20E-P



Pocket Size Communicator



1 Line Alphanumeric Pager

FEATURE

Easy-to-Read

- Big character size.
- 1 X 14 characters display.
- Scrolling with 3 selectable speed.
- Highly visible backlight.

Memory Capacity

- 16 private messages with max 840 characters.
- 1 public message with max 120 characters.
- Max 4 private messages can be protected.

Memory Back Up

- Back up memory during battery replacement.

FUNCTION


- 4 paging addresses in 2 frames
- Date / Time stamp for each message
- 2 tones, 3 melodies and vibration selectable
- Error and Repeat call indication
- Low battery and out of range indication
- Unread message indication
- Welcome message (up to 30 characters) programmable
- Alarm and clock

DISPLAY



- | | | |
|----------------------------------------------------------|-----------------|-----------------|
| 1. Unread message | 5. Buzzer alert | 8. In range |
| 2. Repeat message | 6. Motor alert | 9. Battery low |
| 3. Lock | 7. Alarm on | 10. Next screen |
| 4. Private message number ([for public message number) | | |

GENERAL GUIDE

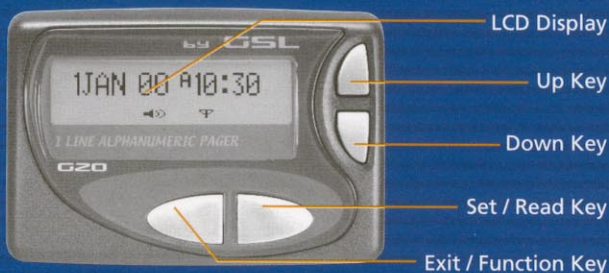

SPECIFICATION

Signal Format	POCSAG
Radio Frequency	135MHz – 175MHz 275MHz – 285MHz 929MHz – 931MHz
Bit Rate	512bps/1200bps/2400bps
Paging Sensitivity	512bps : 18dB μ V/m 1200bps : 21dB μ V/m 2400bps : 24dB μ V/m
Spurious Rejection	50dB
Channel Spacing	25KHz
Deviation	+/- 4.5KHz
Intermodulation	50dB
Battery	One AAA Battery
Battery Life	>30 days
Dimensions	L68 X W46 X H20.5(mm)
Weight (with battery)	55g



Certificate No. : 943540

Group Sense Ltd.
27/F., Wu Chung House, 213 Queen's Road East,
Wanchai, Hong Kong.
Tel. : (852) 2832 8228
Fax. : (852) 2892 0361
Web Site : <http://www.gsl.com.hk>
Email : gsl@gsl.com.hk

www.telcomsa.es

Tel. (+34) 91 103 30 00